

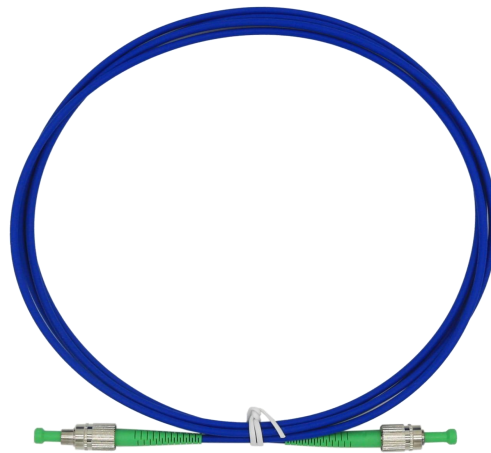




Technical Parameter

Parameter/参数		Value
Connector Type		FC/UPC, SC/UPC, LC/UPC FC/APC, SC/APC,
Wavelength (nm)		1310 , 1550
Insertion Loss (dB)		≤0.3
Return loss(dB)	UPC Type	≥50
	APC type	≥60
Extinction Ratio 23℃ (dB)		≥23
Fiber Type		PM1310, PM1550
Key Orientation		Slow Axis
Angle (deg)		±3
Operating temperature (°C)		-5~+70
Storage temperature (°C)		-40 ~ +80



 Ordering Information HC-PMJP-A-B-C-D-E

	A	B	C	D	E
PMJP	Wavelength	Pigtail Type	Fiber Length	Connector1	Connector2
	1=850nm	1=250um bare fiber	H=0.5m	0=None	0=None
	2=980nm	2=900um loose tube	8=0.8m	1=FC/UPC	1=FC/UPC
	3=1064nm	3=3mm loose tube	1=1.0m	2=FC/APC	2=FC/APC
	4=1310nm	4=2mm loose tube	2=2.0m	3=SC/APC	3=SC/APC
	5=1480nm		3=3.0m	4=SC/UPC	4=SC/UPC
	6=1550nm		4=4.0m	5=MU	5=MU
			5=5.0m	6=LC/PC	6=LC/PC
			A=0.3m	7=LC/APC	7=LC/APC
			B=1.5m	8=E2000 APC	8=E2000 APC
				9=E2000 PC	9=E2000 PC