



Features

- Low PDL
- High Isolation
- Low Insertion Loss
- Excellent Environment Reliability

Applications

- MAN
- WDM System
- CATV System



Specification

Parameter		HC-4CH-MINI CWDM
Center Wavelength (nm)		1270-1610nm
Channel Passband (nm)		CW±6.5
Insertion Loss (dB)		≤1.0
Isolation (dB)	Adjacent	≥30
	Non-adjacent	≥40
Polarization Dependent Loss (dB)		<0.2
Polarization Mode Dispersion (ps)		<0.2
Directivity (dB)		≥50
Return Loss (dB)		≥45
Maximum Power Handling (mW)		300
Operating Temperature (°C)		-10~+70
Storage Temperature (°C)		-40~+85
Package Dimension (mm)		L44x W28 x H6.2 or L54x W28 x H7.4


Above specification are for device without connector.

Add an addotional 0.2dB loss per connector.




 Dimension(mm)

A: L 44x W 28 x H 6.2

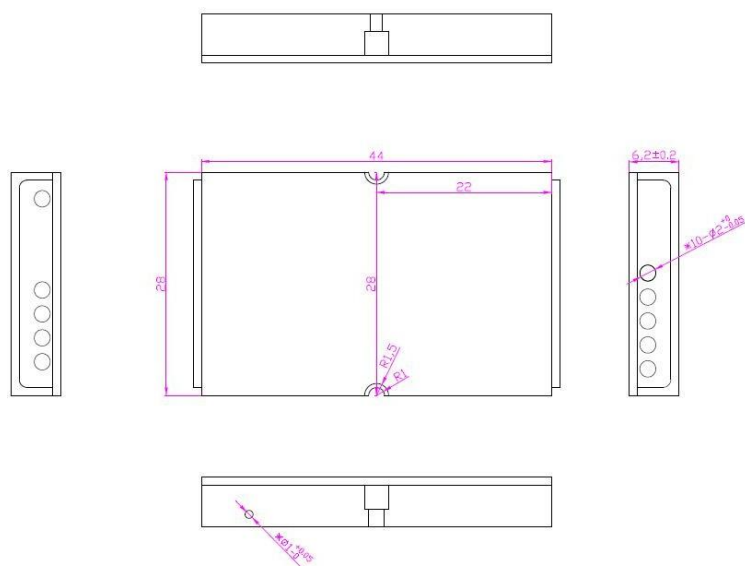

B: L 54x W 28 x H 7.4

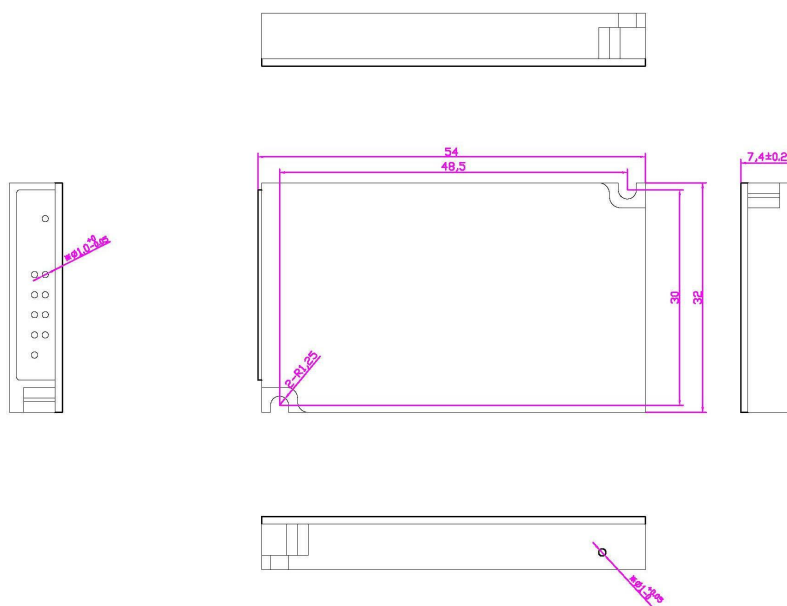



 Order Information: HC-4CH-MINI CWDM-A-B-C-D-E-F

Number of Channels	1st Channel	Configuration	Dimension(mm)	Fiber Type	Fiber Length	Connector
	A	B	C	D	E	F
4 Channel	27=1270nm 47=1470nm 61=1610nm	M=Mux D=Demux	1=A: L44x W28 x H6. 2=B: L54x W28 x H7.4	1=Bare fiber 2=900um loose tube	1=1m 2=2m S=Specify	0=None 1=FC/APC 2=FC/PC 3=FC/UPC 4=SC/APC 5=SC/PC 6=SC/UPC 7=ST 8=LC/UPC 9=LC/APC S=Specify